


laservision

laser safety spectacle F29P1D09




Articlenumber: F29P1D091001
GTIN: 4050369059429
Unit: 1 Stück
Weight incl. packaging 0,27 kg
Weight excl. packaging: 0,03 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

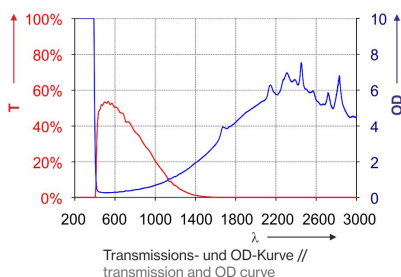

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- LB Protection levels acc. to EN 207
- Especially suitable for Er:YAG or CO₂-Lasers
- CE certification
- Excellent colour view and very high VLT
- Filter for surgical / dental lasers
- Available in the frames [F18](#), [F22](#), [F29](#), [F42](#) and [F46](#)
- Available in the safety laser goggle with magnifier ([F27](#))

The laservision laser safety spectacle F29.P1D09.1001 with the gray-green filter is suitable for Er:YAG and CO₂-laser and offers full protection. The sporty frame with multi-adjustable temples has a good all-round view and is very comfortable to wear. The laser safety spectacle possesses a single shield in base curve 9 (BC 9) which ensures a very good perspective and a large field of view. A comfortable fit is ensured with soft, curved soft-flex bridge pieces. The soft ear pieces guarantee a safe, stable and pressure free fit. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For a professional cleaning of laser safety spectacles laservision recommends the cleaning station (A99.CLSTA.1300).

COATING:	no coating
FILTER:	P1D09
FILTER COLOUR:	Grey green
FILTER CURVATURE:	Base curve 9
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F29
FRAME TYPE:	Spectacle
PROPERTIES:	Lightweight
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	near infrared, Infrared
VLT (APPROX.):	50%
VISUAL BRIGHTNESS:	Very good
COLOUR RECOGNITION:	Very good

laser safety spectacle F29P1D09

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
1400 - <1450	(OD1+)	DIRM LB1
1450 - <1640	(OD2+)	DIRM LB2
1640 - <1800	(OD3+)	DIRM LB3
1800 - <1980	(OD4+)	DI LB4 + R LB3Y + M LB3
1980 - 2600	(OD5+)	DI LB4 + R LB3Y + M LB3
>2600 - 3500	(OD4+)	DI LB4 + R LB3Y + M LB3
>3500 - <5400	(OD2+)	DIRM LB2
5400 - 11500	(OD6+)	DI LB4 + R LB3Y + M LB4Y