


laservision

laser safety spectacle F22P1E01




Articlenumber: F22P1E011001
GTIN: 4050369017092
Unit: 1 Stück
Weight incl. packaging 0,23 kg
Weight excl. packaging: 0,04 kg

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filtercurve

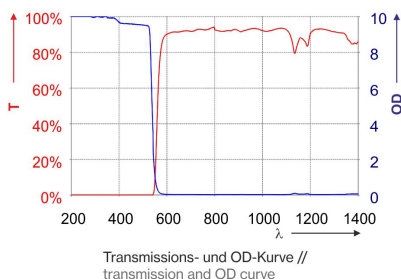

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- LB Protection levels acc. to EN 207
- Especially suitable for UV and Nd:YAG Lasers (266,355nm,532nm)
- Fluorescence effect for 532nm laser for alignment
- Good visual brightness and 40% VLT
- Good for gas and UV-Excimer laser
- Available in the frames: [F18](#), [F20](#), [F22](#), [F42](#) and [F46](#)
- Available also in the laser safety magnifier ([F27](#))

The laser safety goggle F22.P1E01.1001 with standard temples is suitable for lasers within the UV- and VIS-range, especially for green and blue Nd:YAG lasers (2. and 3. harmonics). It can also be worn over prescription glasses. The continuous, single shield provides a broad field of vision without any restriction by a frame. The F22 frames' features are extremely low weight and a nearly ideal fit to every shape of head. The eyewear comes in a sustainably produced hexagonal cardboard box, along with a microfiber pouch and a cord to hang the goggles on. For a professional cleaning of laser safety spectacles laservision recommends the cleaning station (A99.CLSTA.1300).

COATING:	Anti-scratch on both sides
FILTER:	P1E01
FILTER COLOUR:	Orange
FILTER MATERIAL:	Plastic
FILTER TECHNOLOGY:	Absorption filter
FILTER THICKNESS:	ca. 2mm
FRAME:	F22
FRAME TYPE:	OTG with temples
PROPERTIES:	Lightweight
PROTECTION CLASS / NORM:	EN 207 full protection
PROTECTION RANGE:	visible, ultraviolet
VLT (APPROX.):	40%
VISUAL BRIGHTNESS:	Good
COLOUR RECOGNITION:	Limited

laser safety spectacle F22P1E01

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
180 - 315	(OD10+)	D LB10 + IR LB4 + M LB6Y
>315 - 532	(OD8+)	D LB6 + IRM LB8
>532 - 534	(OD7+)	D LB6 + IRM LB7
>534 - 536	(OD6+)	DIRM LB6
>536 - 538	(OD5+)	DIRM LB5
>538 - 540	(OD4+)	DIRM LB4
>540 - 542	(OD3+)	DIRM LB3
>542 - 545	(OD2+)	DIRM LB2
>545 - 550	(OD1+)	DIRM LB1